

MAX HD2 Mini



Mission Critical 4G LTE Bandwidth Bonding Router




Compact Dual 4G LTE Mobile Router

The HD2 Mini packs big features, such as dual embedded cellular, SpeedFusion bandwidth bonding, and PoE, into a tough, compact enclosure that stands up to life on the go.

Works With*



*Selected models



Dual Cellular and Redundant SIM Slots

Dual Cellular and Redundant SIM slots allow you to use the same or different cellular providers for bandwidth bonding, data coverage protection or eliminating blind spots.



Fleet Tracking and Management


With built-in GPS fleet tracking and InControl cloud-based management, you can keep tabs on location and manage your mobile network from any Internet-connected device.



Meet Strict Security Compliance

Got a strict no-Wi-Fi security policy? Configured without Wi-Fi, the BR1 ENT is a great choice for deployments with compliance requirements.

SpeedFusion[™]
Bonding Technology



SpeedFusion Bandwidth Bonding and Seamless Failover

SpeedFusion bandwidth bonding technology bonds all connected bandwidth into a single superfast stream, using the same or different cellular providers.



Customize Captive Portal

Branding your captive portal is as easy as uploading your logo and terms & conditions. You can easily set bandwidth allowance and access duration per user or manage access using RADIUS.



Certified Toughness



In addition to rugged metal enclosure, HD2 Mini has certifications on:
RF Port Lightning Immunity:
ITU-T K.20 (+/- 1.5 kV)
Shock and vibration resistance
(EN 61373:1999, IEC 61373:1999)
Railway applications (EN 50155)
Electromagnetic Compatibility (EN 61000)

Specifications

MAX HD2 Mini

WAN Interface	1x USB Interface 1x GE 2x Embedded LTE Modems with Redundant SIM Slots
LAN Interface	2x GE
Router Throughput	300Mbps
Recommended Users	150
LTE Modem	Downlink/Uplink Datarate: 100Mbps/50Mbps
LTE-A Modem	Downlink/Uplink Datarate: 300Mbps/50Mbps
Cellular and GPS Antenna Connector	4x SMA Antenna Connectors 1x SMA GPS Antenna Connector
Power Input	DC Jack/Terminal Block: 12V – 48V 2A
Power Output	Up To Three 802.3af/24V Pepwave Passive PoE Outputs*
Power Consumption	15W (max.)
Dimensions	1.6 x 5.8 x 5 inches 40 x 147 x 128 mm
Weight	0.96 pounds 0.5 kg
Operating Temperature	-40° – 149°F -40° – 65°C
Humidity	15% – 95% (non-condensing)
Certifications	FCC, CE, RoHS, E-Mark RF Port Lightning Immunity: ITU-T K.20 (+/- 1.5 kV) EN 61373:1999 IEC 61373:1999 : Shock and Vibration Resistance: EN 50155: Railway Applications EN 61000: Electromagnetic Compatibility
Warranty	1-Year Limited Warranty

*PoE Kit is available separately

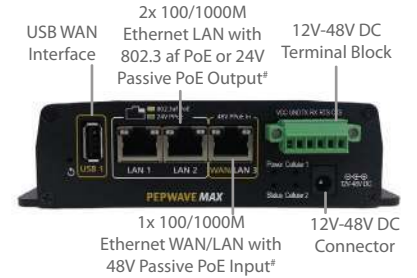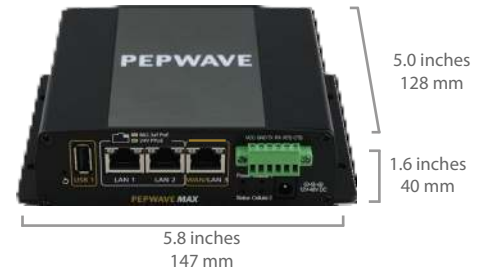

Ordering Information

	Product Code	Carrier/Region	Cellular Standard	4G Bands/Frequencies (MHz)	3G Bands/Frequencies (MHz)
LTE	MAX-HD2-MINI-LTE-US-T	Verizon/Sprint/AT&T/T-Mobile	LTE	B2/1900, B4/AWS, B5/850, B13/700, B17/700, B25/1900	WCDMA/HSPA+/DC-HSPA+: B1/2100, B2/1900, B4/AWS, B5/850, B8/900 EV-DO Rev.A: BC0/800, BC1/1900, BC10/800
	MAX-HD2-MINI-LTE-UE-T	Cellular 1: Verizon/Sprint/AT&T/T-Mobile	LTE	Cellular 1 B2/1900, B4/AWS (XLTE), B5/850, B13/700, B17/700, B25/1900	Cellular 1 WCDMA/HSPA+/DC-HSPA+: B1/2100, B2/1900, B4/AWS, B5/850, B8/900 EV-DO Rev.A: BC0/800, BC1/1900, BC10/800
		Cellular 2: Europe/International	LTE	Cellular 2 B1/2100, B3/1800, B7/2600, B8/900, B20/800	Cellular 2 WCDMA/HSPA+/DC-HSPA+: B1/2100, B2/1900, B5/850, B6/800, B8/900
	MAX-HD2-MINI-LTE-E-T	Europe/International	LTE	B1/2100, B3/1800, B7/2600, B8/900, B20/800	WCDMA/HSPA+/DC-HSPA+: B1/2100, B2/1900, B5/850, B6/800, B8/900
LTE-A	MAX-HD2-MINI-LTEA-W-T	Worldwide [^]	LTE Advanced	B1/2100, B2/1900, B3/1800, B4/AWS, B5/850, B7/2600, B8/900GSM, B12/700a, B13/700c, B20/800DD, B25/1900+, B26/850+, B29/700d, B30/2300WCS, B41/TD 2500	WCDMA/HSPA+/DC-HSPA+: B1/2100, B2/1900, B3/1800, B4/AWS, B5/850, B8/900
	MAX-HD2-MINI-LTEA-P-T	Asia Pacific	LTE Advanced	B1/2100, B3/1800, B5/850, B7/2600, B8/900, B18/800 Lower, B19/800 Upper, B21/1500 Upper, B28/700 APT, B38/TD 2600, B39/TD 1900+, B40/TD 2300, B41/TD 2500	WCDMA/HSPA+/DC-HSPA+: B1/2100, B5/850, B8/900, B9/1800, B19/800 Upper UMTS: B6/800 TD-SCDMA: B39/1900

[^]Pending certification by Verizon and Sprint in the US

Add-on Feature

Product Code	Product Name	Description
ACW-609	PoE Activation Kit	Includes 1x 48V Power Supply Enables 802.3af PoE Output Ports (PoE License automatically applied after kit purchase)